


# 4-inch Multifunction IP Camera test Monitor

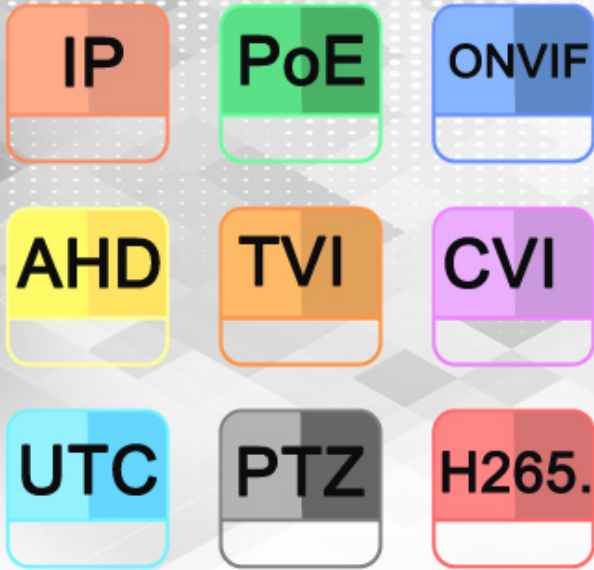

Screen	Resolution	4-inch IPS touch screen with 800x480 resolution	
Video Mode	CVBS test	1 channel BNC input & 1 channel BNC looped output, NTSC/PAL (Auto adapt)	
		PTZ control, RS485 control, Baud 600-115200bps, compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc	
	IP camera test 4K/H.265/H.264	IP Discovery/Quick ONVIF/IPC test /RTSP play /Client APK	
		Rapid Video	Auto view the video, create testing report
		Hik test tool	pressing just one key to activate hikvision camera , Image test
		Dahua test tool	pressing just one key to activate Dahua camera , Image test
	Zoom Image	4x zoom, to enlarge image, Screen snapshot, record, save, view and record and play back	
Coaxial HD test	8MP TVI camera test, 3840 x 2160P 15 FPS, UTC control/ call OSD menu		
	4MP CVI camera test, 2560 x 1440P 25/30 FPS, UTC control d call OSD menu		
	5MP AHD test, 2560x1944P 12.5F/20F, UTC control d call OSD menu		
Record/Playback	Video record and Snapshot testing video onto Micro SD card		
Power output	12V/3A power	Output DC12V/3A power out, supply temporarily power for the camera	
	PoE power output	48V PoE power output, max power 24W	
Network test	Trace route, Link monitor, DHCP server, port flashing, Ping test		
Audio test	1 channel audio signal input, test whether sound normal, 1 channel audio signal, to connect headphone		
Drop-down menu	The shortcut menu includes POE power output, IP settings, HDMI IN, CVBS, TV OUT, LAN, settings etc.		
Power supply	DC 12V1A		
Battery	Built-in 7.4V Lithium polymer battery , 2400mAh		
Rechargeable	After charging 4~5 hours, normal working time 7 hours		
Operation setting	OSD menu, select your desired language: English, Chinese, Japanese, Russian, Italian, French, Spanish, etc		
Auto off	1-30 (mins)		
Dimension/Weight	126mm x 83mm x 33mm / 0.32kg		