



The multifunction IP camera tester AN-IP702


1920
X
1200

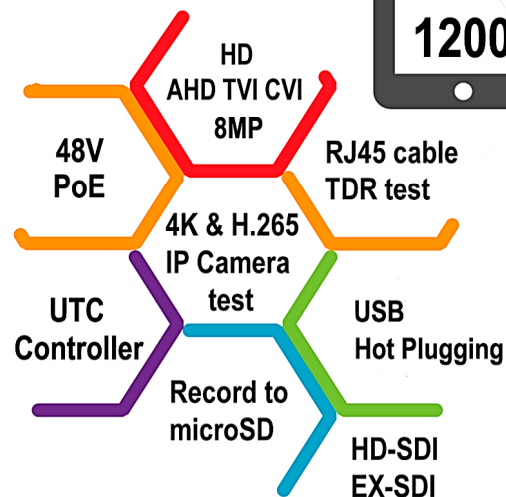

Voltage test for PoE and DC12V

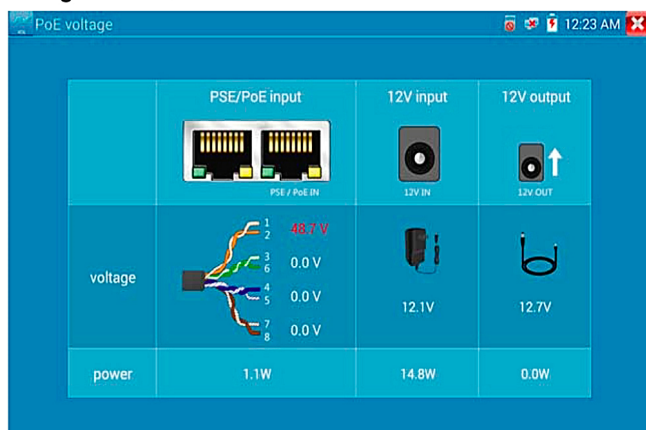

RJ45 cable TDR test up to 180M Visualized cable test for LAN cable and UTP cable

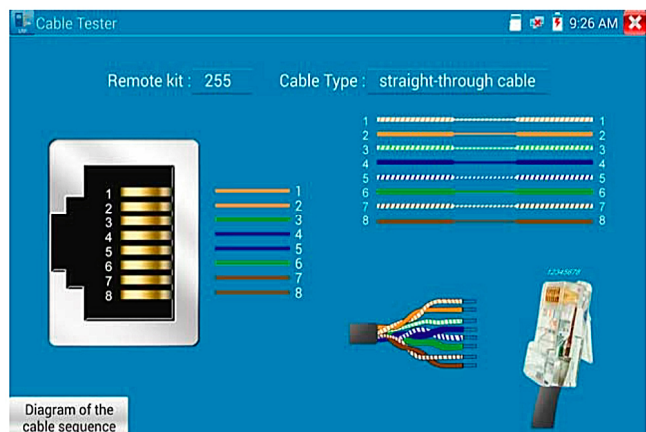

Model	IP Camera Tester
Display	7-inch touch screen with 1920x1200 resolution
Network port	10/100/1000M auto adjust, RJ45
WIFI	WIFI 150Mbps to connect to a wireless network and view IP cameras
Mainstream test	4K,H.265/H.264 camera image display by mainstream testing
IP camera type	ONVIF,ONVIF PTZ, Dahua IPC-HFW2100P, Hikvision DS-2CD864-E13, Samsung SNZ-5200, Tiandy TD-NC9200S2, Kodak IPC120L, Honeywell HICC-2300T, RTSP Viewer, etc
SDI signal test (Optional)	1 channel SDI BNC input. Supports up to 1080p 25/30/50/60, 1080i 50/60
AHD TVI CVI signal test	1 channel AHD/ TVI /CVI BNC input. Supports AHD 5MP, TVI 4MP, CVI 4MP
Zoom Image	Analog and IP camera image zooming & movement
Snapshot, Video record and playback	Capture current images and record live video as JPG file. Media player will view photos and playback video
HDMI IN	720×480p /720×576p /1280×720p /1920×1080p /1024×768p/1280×1024p /1280×900p /1440×900p
HDMI output	1 channel HDMI output, supports up to 1080p
RJ45 cable TDR test	RJ45 cable TDR test and cable quality test, to test cable pair status, length, attenuation reflectivity, impedance, skew and other parameter.
power output	Output DC 12V/3A power to camera
USB 5V power output	5V 2A power output only ,NO data
PoE power output	48V PoE power output, Max power 24W
Audio test	1 channel audio signal input and output to connect headphones
PTZ control	Support RS485 control, Baud 600-115200bps, Compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic, Lilin, Yaan, etc
Color bar generator	Output one channel PAL/NTSC color bar video signal for testing monitor or video cable. (red, green ,blue, white and black color)
UTP Cable tester	Test UTP cable connection status and display on the screen. Read the number on the screen.
Network test	IP address scan, link scan, and Ping test. Quickly search the for IP camera's IP address
PoE / PSE voltage test	Measures PoE switch voltage and displays pin configuration
WIFI	Built in WIFI, can create WIFI hotspot
Battery	Built-in 7.4V Lithium polymer battery, 5000mAh
Rechargeable	After charging 5~6 hours, normal working time 10hours
Operation setting	Capacitive touch screen, OSD menu, select your desired language: English, Chinese, Korean, Russian, Italian or Polish, etc
Dimension / Weight	240mm x 154mm x 46mm / 625g

TOPSONIC

Safety :
Comply to IEC 61000-4



Made in Taiwan